


G12-35XC



The 35XC is built using tried-and-tested materials and construction methods, and incorporates several new design features and techniques. Drawing on 90 years' experience, we've been able to create a uniquely versatile speaker whose attributes will be familiar to those who know Pulsionic coned speakers. Capable of delivering open and musical cleans without sacrificing an immensely satisfying crunch or searing, overdriven lead lines, the 35XC is made to engage your musical soul. This speaker exhibits poise, tonal evenness and freedom from souring colourations, characteristics typical of speakers with Pulsionic cones, as well as adding a little more sparkle and air to your sound. A 90th Anniversary gift from Celestion to players who won't compromise in their search for great tone.

8 Ω Frequency Response

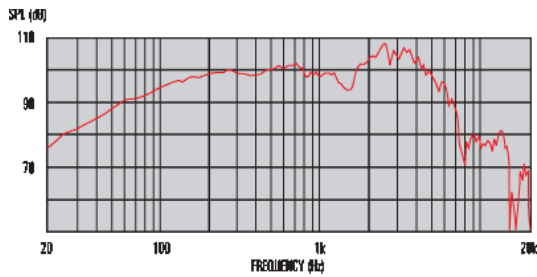

General Specifications

Power rating	35W
Nominal impedance	8 Ω
Sensitivity	100dB
Chassis type	Pressed steel
Voice coil diameter	1.75", 44.5mm
Voice coil material	Round copper
Magnet type	Ceramic
Magnet weight	42oz, 1.2kg
Frequency range	75-5000Hz
Resonance frequency, Fs	75Hz
DC resistance, Re	6.4 Ω

Mounting Information

Cut-out diameter	11.1", 283mm
Diameter	12.2", 309mm
Magnet structure diameter	6.1", 156mm
Mounting slot dimensions	0.31", 7.9mm \varnothing
Mounting slot PCD	11.7", 297mm
Number of mounting slots	8
Overall depth	5.3", 135mm
Unit weight	10.4lb, 4.7kg